


HSG type (Input voltage 230 V)							Dimensions		
Output voltage 0 ÷ 230 V			Output voltage 0 ÷ 260 V			Model	a	d1	
Type	Is (A)	P (VA)	Type	Is (A)	P (VA)	Mass (kg)	Model	a	d1
HSG 230/1	1.0	230	HSG 260/0.8	0.8	208	1.4	M15	52	85
HSG 230/1.6	1.6	368	HSG 260/1.2	1.2	312	2.4	M30 or M30/C	74	100
HSG 230/2	2.0	460	HSG 260/1.4	1.4	364	2.4	M30 or M30/C	74	100
HSG 230/3	3.0	690	HSG 260/2.5	2.5	650	3.5	M50	83	119
HSG 230/4.5	4.5	1035	HSG 260/3.5	3.5	910	4.6	M100	86	125
HSG 230/6	6.0	1380	HSG 260/4.5	4.5	1170	4.6	M100	100	153
HSG 230/8	8.0	1840	HSG 260/6.3	6.3	1638	7.0	M200	110	174
HSG 230/10	10.0	2300	HSG 260/8	8.0	2080	7.0	M200	125	226
HSG 230/12	12.0	2760	HSG 260/10	10.0	2600	9.2	M250	149	300
HSG 230/18	18.0	4140	HSG 260/15	15.0	3900	13.3	M300	155	340
HSG 230/23	23.0	5290	HSG 260/20	20.0	5200	14.0	M400		
HSG 230/32	32.0	7360	HSG 260/30	30.0	7800	20.5	M500		




## Optional Accessories

### Buttons

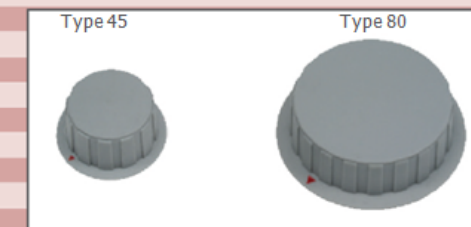

Type	For model	Dimension (∅ x h)	Code No.
45	M15	45 x 22 mm	90 280 107
45	M30	45 x 22 mm	90 280 107
45	M50	45 x 22 mm	90 280 107
80	M100	80 x 23,5 mm	90 280 108
80	M200	80 x 23,5 mm	90 280 108
80	M205	80 x 23,5 mm	90 280 108
80	M300	80 x 23,5 mm	90 280 108
80	M400	80 x 23,5 mm	90 280 108
80	M500	80 x 23,5 mm	90 280 108
80	HST	80 x 23,5 mm	90 280 096

### Scales

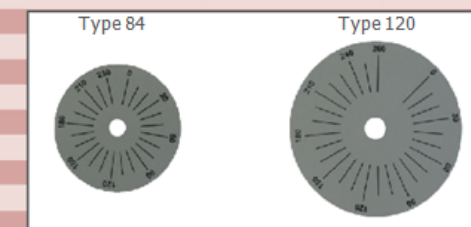

Type	U output (V)	Dimension (∅)	Code No.
84	0 - 48	84 mm	17 285 684
84	0 - 230	84 mm	18 285 023
84	0 - 260	84 mm	18 285 024
84	0 - 400	84 mm	18 285 029
84	0 - 450	84 mm	18 285 030
84	0 - 100 %	84 mm	18 285 027
120	0 - 230	120 mm	18 285 025
120	0 - 260	120 mm	18 285 026
120	0 - 400	120 mm	18 285 031
120	0 - 450	120 mm	18 285 032
120	0 - 100 %	120 mm	18 285 028
120	0 - 100 %	120 mm	18 285 048**

\*\* for HST type